

Locking / Mounting Cable Tie

PRODUCTS DESCRIPTION

MATERIAL Approved Nylon 6/6

COLOR Natural Or Black, Other Especial Color Or Material Is Also Available

FLAME-RETARDANT UL 94-V2


TEMPERATURE RANGE -40 °C ~ 85 °C

產品描述

材質 採用UL合格之Nylon 6/6製成，防火等級94-V2，耐酸鹼，不易老化，承受力強，帶頭附加螺絲固定座，兼具電線結束整理及固定等功用

顏色 標準色為尼龍本色(白色)或黑色；另外也接受訂製特殊顏色、抗UV及耐高溫等材質

操作溫度 -40 °C ~ 85 °C

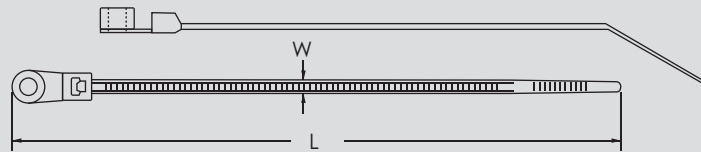

PRODUCTS SPECIFICATION

ITEM NO.		LENGTH (L)		WIDTH (W)		BUNDLE DIA		TENSILE STRENGTH	
1000PCS	100PCS	mm	inch	mm	inch	mm	inch	kgs	lbs
GS-40		160	6-5/16	3.6	0.14	40	1-3/8	18.2	40
GS-50S		205	7-7/8	4.8	0.19	50	2	22.17	50
GS-50M		300	11-3/5	4.8	0.19	76	3	22.17	50
	GS-50L	370	14-1/2	4.8	0.19	102	4	22.17	50
	GS-120S ⁰	150	5-9/10	7.6	0.30	36	1-2/5	54.4	120
	GS-120S	200	7-7/8	7.6	0.30	50	2	54.4	120
	GS-120S ¹	250	9-7/8	7.6	0.30	60	2-2/5	54.4	120
	GS-120S ²	300	11-4/5	7.6	0.30	76	3	54.4	120
	GS-120	370	14-1/2	7.6	0.30	102	4	54.4	120