

# Nylon Cable Tie




## PRODUCTS DISCRIPTION

MATERIAL	UL APPROVED NYLON (PA) 6/6
COLOR	NATURAL OR BLACK, OTHER ESPECIAL COLOR IS ALSO AVAILABLE
FLAME-RETARDANT	UL 94-V2
TEMPERATURE RANGE	-40°C UP TO + 85°C

## 產品描述

材質	採用UL合格之NYLON6/6製成，防火等級94-V2，耐酸鹼，不易老化，承受力強
顏色	標準色為尼龍本色(白色)或黑色；另外也接受訂製特殊顏色、抗UV及耐高溫等材質
操作溫度	-40度C~85度C

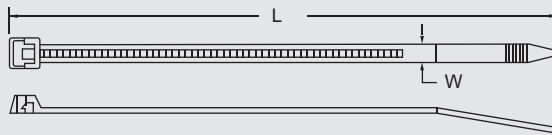

## PRODUCTS SPECIFICATION

ITEM NO.		LENGTH (L)		WIDTH (W)		BUNDLE DIA		TENSILE STRENGTH	
1000PCS	100PCS	mm	inch	mm	inch	mm	inch	kgs	lbs
GT-18S <sup>1</sup>		80	3-3/20	2.4	0.09	15	3/5	8	17-5/8
GT-18S <sup>2</sup>		90	3-1/2	2.4	0.09	16	3/5	8	17-5/8
GT-18S <sup>3</sup>		100	4	2.5	0.10	18	7/10	8.1	18
GT-18M		120	4-3/4	2.5	0.10	30	1-3/16	8.1	18
GT-18M <sup>1</sup>		140	5-1/2	2.5	0.10	35	1-3/8	8.1	18
GT-18M <sup>2</sup>		160	6-5/16	2.5	0.10	40	1-3/5	8.1	18
GT-18L		200	7-7/8	2.5	0.10	50	2	8.1	18
GT-40S		150	5-9/10	3.6	0.14	33	1-3/8	18.2	40
GT-40M		200	7-7/8	3.6	0.14	50	2	18.2	40
GT-40M <sup>2</sup>		250	9-7/8	3.6	0.14	60	2-3/5	18.2	40
GT-40L		300	11-3/5	3.6	0.14	76	3	18.2	40
GT-40L <sup>2</sup>		370	14-1/2	3.6	0.14	102	4	18.2	40
GT-50S		120	4-3/4	4.8	0.19	24	1	22.17	50
GT-50S <sup>1</sup>		160	6-5/16	4.8	0.19	38	1-1/2	22.17	50
GT-50S <sup>2</sup>		190	7-1/2	4.8	0.19	43	1-7/10	22.17	50
GT-50S <sup>3</sup>		200	7-7/8	4.8	0.19	50	2	22.17	50
GT-50M <sup>0</sup>		250	9-7/8	4.8	0.19	60	2-2/5	22.17	50
GT-50M		300	11-4/5	4.8	0.19	76	3	22.17	50
	GT-50L <sup>1</sup>	370	14-1/2	4.8	0.19	102	4	22.17	50
	GT-50L <sup>2</sup>	430	16-9/10	4.8	0.19	110	4-2/3	22.17	50
	GT-120S <sup>0</sup>	150	5-9/10	7.6	0.30	36	1-2/5	54.4	120
	GT-120S	200	7-7/8	7.6	0.30	50	2	54.4	120
	GT-120S <sup>2</sup>	250	9-7/8	7.6	0.30	65	2-3/5	54.4	120
	GT-120S <sup>1</sup>	300	11-4/5	7.6	0.30	76	3	54.4	120
	GT-120M	368	14-1/2	7.6	0.30	102	4	54.4	120
	GT-120M <sup>1</sup>	430	16-9/10	7.6	0.30	110	4-1/3	54.4	120
	GT-120EM	470	18-1/2	7.6	0.30	120	5	54.4	120
	GT-120M <sup>2</sup>	533	21	7.6	0.30	140	5-1/2	54.4	120
	GT-120L	710	28	7.6	0.30	190	7-1/2	54.4	120
	GT-175S <sup>0</sup>	430	16-9/10	9.0	0.35	110	4-1/3	79.4	175
	GT-175S	533	21	9.0	0.35	140	5-1/2	79.4	175
	GT-175M	655	26-1/2	9.0	0.35	175	7	79.4	175
	GT-175L <sup>1</sup>	710	28	9.0	0.35	190	7-1/2	79.4	175
	GT-175EL	780	30-5/8	9.0	0.35	228	9	79.4	175
	GT-175L <sup>2</sup>	812	32	9.0	0.35	239	9-2/5	79.4	175