

Stainless Steel Cable Tie (With Ball Lock)

PRODUCTS DESCRIPTION

MATERIAL | AISI 316 / 304 Stainless Steel

TEMPERATURE RANGE | -80 °C ~ 538 °C

Quickly & Easily installation than traditional metal strapping systems, the strong feature suit for indoor, outdoor and underground, especially focus on tough environment which like Telecommunication, Marine Vessels, Aircraft & Engineering Mechanism.


產品描述

材質 | AISI耐腐蝕不鏽鋼316 / 304

操作溫度 | -80 °C ~ 538 °C

特點

採用特殊鋼珠自鎖設計，在使用上比傳統的金屬打包帶更為快速且較容易上手，強勁且耐腐蝕特性，可適用在室內外及地下...等特殊工作環境，尤其是針對通訊、輸油管、海運、航空器及工程機械...等用途

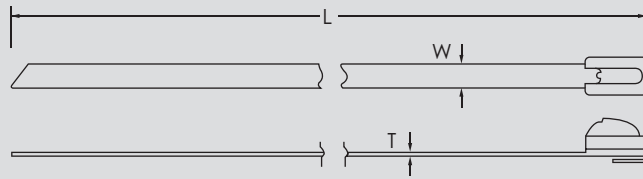

SUS 316/304 T=0.010" (0.3mm)

PRODUCTS SPECIFICATION

ITEM NO.	MAX		" L "		" W "		MIN LOOP		PKG.
	BUNDLE DIA		LENGTH APPROX		WIDTH APPROX		TENSILE		QTY.
	inch	mm	inch	mm	inch	mm	lbs	kg	
BCT-450152	1.0	25	6	152	.177	4.6	100	45.3	100
BCT-450201	2.0	50	8	201					
BCT-450266	2.9	72	11	266					
BCT-450300	3.3	82	12	300					
BCT-450362	4.0	102	14	362					
BCT-450521	6.0	152	20	521					
BCT-450679	8.0	203	27	679					
BCT-450838	10.0	254	33	838					
BCT-450998	12.2	305	40	998					
BCT-451250	15.4	385	50	1250					
BCT-800201	2.0	50	8	201	.315	7.9	250	113.3	100
BCT-800266	2.9	72	11	266					
BCT-800300	3.3	82	12	300					
BCT-800362	4.0	102	14	362					
BCT-800521	6.0	152	20	521					
BCT-800679	8.0	203	27	679					
BCT-800838	10.0	254	33	838					
BCT-800998	12.2	305	41	998					
1BCT-801250	15.4	385	50	1250					50