

Stainless Steel Cable Tie (With Ball Lock)

PRODUCTS DESCRIPTION

MATERIAL | AISI 316 / 304 Stainless Steel

TEMPERATURE RANGE | -80 °C ~ 538 °C

Quickly & Easily installation than traditional metal strapping systems, the strong feature suit for indoor, outdoor and underground, especially focus on tough environment which like Telecommunication, Marine Vessels, Aircraft & Engineering Mechanism.


產品描述

材質 | AISI耐腐蝕不鏽鋼316 / 304

操作溫度 | -80 °C ~ 538 °C

特點

採用特殊鋼珠自鎖設計，在使用上比傳統的金屬打包帶更為快速且較容易上手，強勁且耐腐蝕特性，可適用在室內外及地下...等特殊工作環境，尤其是針對通訊、輸油管、海運、航空器及工程機械...等用途

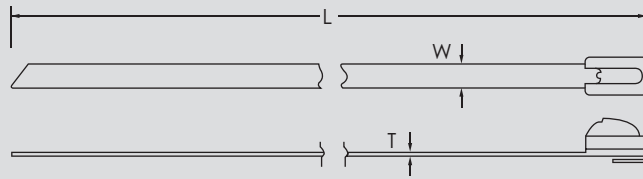

SUS 316/304 T=0.010" (0.3mm)

PRODUCTS SPECIFICATION

| ITEM NO. | MAX | | " L " | | " W " | | MIN LOOP | | PKG. |
|-------------|------------|-----|---------------|------|--------------|-----|----------|-------|------|
| | BUNDLE DIA | | LENGTH APPROX | | WIDTH APPROX | | TENSILE | | QTY. |
| | inch | mm | inch | mm | inch | mm | lbs | kg | |
| BCT-450152 | 1.0 | 25 | 6 | 152 | .177 | 4.6 | 100 | 45.3 | 100 |
| BCT-450201 | 2.0 | 50 | 8 | 201 | | | | | |
| BCT-450266 | 2.9 | 72 | 11 | 266 | | | | | |
| BCT-450300 | 3.3 | 82 | 12 | 300 | | | | | |
| BCT-450362 | 4.0 | 102 | 14 | 362 | | | | | |
| BCT-450521 | 6.0 | 152 | 20 | 521 | | | | | |
| BCT-450679 | 8.0 | 203 | 27 | 679 | | | | | |
| BCT-450838 | 10.0 | 254 | 33 | 838 | | | | | |
| BCT-450998 | 12.2 | 305 | 40 | 998 | | | | | |
| BCT-451250 | 15.4 | 385 | 50 | 1250 | | | | | |
| BCT-800201 | 2.0 | 50 | 8 | 201 | .315 | 7.9 | 250 | 113.3 | 100 |
| BCT-800266 | 2.9 | 72 | 11 | 266 | | | | | |
| BCT-800300 | 3.3 | 82 | 12 | 300 | | | | | |
| BCT-800362 | 4.0 | 102 | 14 | 362 | | | | | |
| BCT-800521 | 6.0 | 152 | 20 | 521 | | | | | |
| BCT-800679 | 8.0 | 203 | 27 | 679 | | | | | |
| BCT-800838 | 10.0 | 254 | 33 | 838 | | | | | |
| BCT-800998 | 12.2 | 305 | 41 | 998 | | | | | |
| 1BCT-801250 | 15.4 | 385 | 50 | 1250 | | | | | 50 |