

Stainless Steel Tie (Ladder Type)

PRODUCTS DESCRIPTION

MATERIAL AISI 316 / 304 Stainless Steel

TEMPERATURE RANGE -80 °C ~ 538 °C

A unique multi-locking design could make installation more quickly & easily. Besides using corrosion resistant S.S. 316/304, the coated with Nylon 11 for excellent chemical & weathering resistance. The feature suit for indoor, outdoor and underground, especially focus on tough environment which like Telecommunication, Marine Vessels, Aircraft & Engineering Mechanism.


產品描述

材質 AISI耐腐蝕不鏽鋼316 / 304

操作溫度 -80 °C ~ 538 °C

特點

採用獨特地多重扣鎖設計，在使用簡單且快速，除了本身材質具耐腐蝕性，更可在表層加上無毒尼龍披附，增強其抗酸鹼及耐候性，可適用在室內外及地下..等特殊工作環境，尤其是針對通訊、輸油管、海運、航空器及工程機械..等用途。

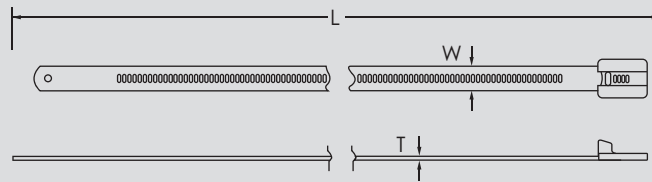

LCT1: Without Coating / LCT2: Black Nylon 11 Coating
SUS 316/304 T=0.010" (0.3mm)

PRODUCTS SPECIFICATION

ITEM NO.	MAX		" L "		" W "		MIN LOOP		PKG. QTY.
	BUNDLE DIA		LENGTH APPROX		WIDTH APPROX		TENSILE		
	inch	mm	inch	mm	inch	mm	lbs	kg	
STL-150S	.86	22	5.9	150	.28	7	250	113.4	100
STL-195S	1.7	45	8	195					
STL-255S	2.5	64	10	255					
STL-335S	3.5	89	13	335					
STL-490S	5.4	139	19	490					
STL-635S	7.2	185	25	635	.472	12	250	113.4	100
STL-150M	.86	22	5.9	150					
STL-195M	1.7	45	8	195					
STL-255M	2.5	64	10	255					
STL-335M	3.5	89	13	335					
STL-490M	5.4	139	19	490					
STL-635M	7.2	185	25	635					