

Splicing Connector

PRODUCTS DESCRIPTION

MATERIAL Solid Copper

INSULATION PC


Make a clean, solid and rapid connection of your wires to keep your communication lines free of noise. Also are available to handle a wide range of conductor sizes and allows you to handle higher pairs wire.

產品描述

材質 採用絕緣性及抗老化性佳的PC材質，內有防水膏以防止水氣浸蝕銅端子

顏色 分別為紅色、黃色及藍色

特點 免剝線即能使通信線路導通，同時達到 UL Category 5 (網路線) 以上寬頻的傳輸效果

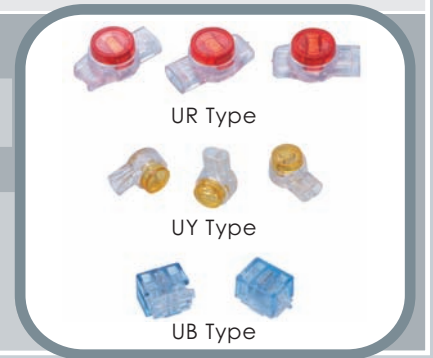

PRODUCTS SPECIFICATION

ITEM NO.	Max Insulation OD (mm)	Application
UR	1.67	A two-or three-wire connection for Y type divergence wire of solid copper 0.9-0.4mm (19-26 AWG) air core or 0.65-0.4mm (22-26 AWG) filled cable.
UY	1.52	A two-wire connector for solid copper 0.65-0.4mm(22-26 AWG) cable.
UB	1.27	A tap connector for T type divergence wire of solid copper 0.65-0.4mm (22-26 AWG) air core or 0.5-0.4mm(24-26 AWG) filled core cable.