

Splicing Connector

PRODUCTS DESCRIPTION

MATERIAL Solid Copper

INSULATION PC


Make a clean, solid and rapid connection of your wires to keep your communication lines free of noise. Also are available to handle a wide range of conductor sizes and allows you to handle higher pairs wire.

產品描述

材質 採用絕緣性及抗老化性佳的PC材質，內有防水膏以防止水氣浸蝕銅端子

顏色 分別為紅色、黃色及藍色

特點 免剝線即能使通信線路導通，同時達到UL Category 5 (網路線) 以上寬頻的傳輸效果

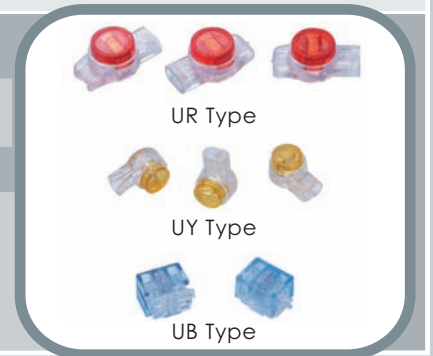

PRODUCTS SPECIFICATION

| ITEM NO. | Max Insulation OD (mm) | Application |
|----------|------------------------|--|
| UR | 1.67 | A two-or three-wire connection for Y type divergence wire of solid copper 0.9-0.4mm (19-26 AWG) air core or 0.65-0.4mm (22-26 AWG) filled cable. |
| UY | 1.52 | A two-wire connector for solid copper 0.65-0.4mm(22-26 AWG) cable. |
| UB | 1.27 | A tap connector for T type divergence wire of solid copper 0.65-0.4mm (22-26 AWG) air core or 0.5-0.4mm(24-26 AWG) filled core cable. |