
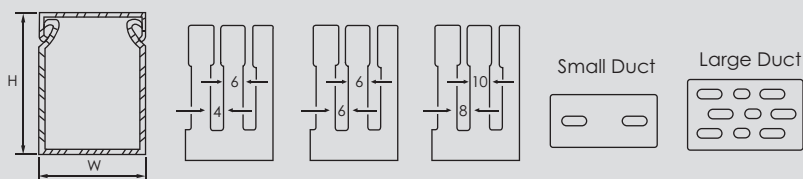


Wire Duct (Slot / Solid)

PRODUCTS DESCRIPTION		產品描述	
MATERIAL	Rigid, High Impact, Self-extinguishing PVC (Gray)	材質	採用低鹵素半硬質PVC料精製，絕緣佳、不自燃且耐高溫
SERVICE TEMP.	85 °C	顏色	標準色為灰色，另外也接受訂製特殊顏色
Used Primarily In Control Panels, The Restricted Slot Design Allow Wires To Be Added Or Removed By Simply Deflecting The Fingers On The Side Of The Duct. All Size Can Be Slot or Solid.		特點	整體構造由槽底及上蓋組成，槽底兩側設出線孔，組合容易不脫落，接合面平滑不傷手，如欲增加線路或維修時，把蓋子打開即可進行工作

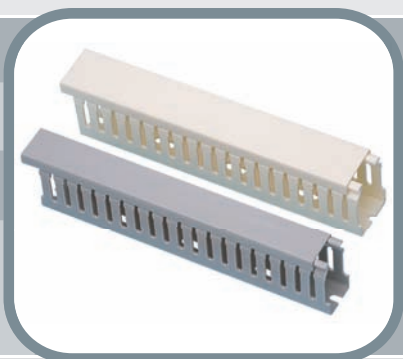

PRODUCTS SPECIFICATION

ITEM NO.				WIDTH x HEIGHT W x H (mm)	2mm ² Wire Can Be Contained (pcs)	Length
Slot Hole Sizes						
Solid	4mm	6mm	8mm			
WD1525	WD1525-4	----	WD1525-8	15 x 25	5~12	1. 7M or 2. 0M Per Piece
WD2525	WD2525-4	WD2525-6	WD2525-8	25 x 25	10~25	
WD2545	WD2545-4	WD2545-6	WD2545-8	25 x 45	20~25	
WD2565	WD2565-4	WD2565-6	WD2565-8	25 x 65	40~45	
WD3333	WD3333-4	WD3333-6	WD3333-8	33 x 33	25~45	
WD3345	WD3345-4	WD3345-6	WD3345-8	33 x 45	40~55	
WD3365	WD3365-4	WD3365-6	WD3365-8	33 x 65	60~75	
WD33100	----	----	WD33100-8	33 x 100	180~200	
WD4040	WD4040-4	----	WD4040-8	40 x 40	40~50	
WD4545	WD4545-4	WD4545-6	WD4545-8	45 x 45	60~70	
WD4565	WD4565-4	WD4565-6	WD4565-8	45 x 65	110~120	
WD5050	WD5050-4	WD5050-6	WD5050-8	50 x 50	80~90	
WD50100	----	----	WD50100-8	50 x 100	200~250	
WD6060	WD6060-4	WD6060-6	WD6060-8	60 x 60	120~135	
WD6545	WD6545-4	WD6545-6	WD6545-8	65 x 45	110~120	
WD6565	WD6565-4	WD6565-6	WD6565-8	65 x 65	180~200	
WD70100	----	----	WD70100-8	70 x 100	250~300	
WD8080	WD8080-4	----	WD8080-8	80 x 80	240~290	
WD10060	WD10060-4	----	WD10060-8	100 x 60	240~290	
WD100100	----	----	WD100100-8	100 x 100	300~400	
WD7264	WD7264-4	WD7264-6	WD7264-8	72 x 64	200~220	
WD4080	WD4080-4	WD4080-6	WD4080-8	40 x 80	120~135	
WD6080	WD6080-4	WD6080-6	WD6080-8	60 x 80	180~210	
WD48100	WD48100-4	WD48100-6	WD48100-8	48 x 100	215~250	
WD15075	WD15075-4	WD15075-6	WD15075-8	150 x 75	335~500	