


# Wire Tie Mount & Cable Clamp

## CABLE CLAMP

MATERIAL	Approved Nylon 6/6
FLAME-RETARDANT	UL 94-V2
USED METHOD	To clamp on loosen cables and screw it to chassis.


## 產品描述

材質	採用UL合格之Nylon 6/6製成，防火等級94-V2，耐酸鹼，不易老化，承受力強
顏色	標準色為尼龍本色(白色)或黑色
操作溫度	-40 °C ~ 85 °C
特點	可將電線或電纜固定於扣內，再以螺絲上緊即可固定於機板上

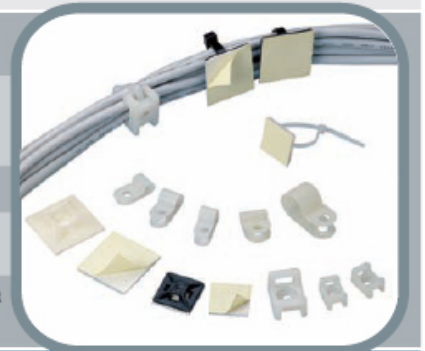

## DIMENSIONS inch (mm)

ITEM NO.	A	B	C	D	E	F
1/8	3.2(0.13)	13.2(0.54)	8.3(0.33)	5.2(0.21)	2.6(0.10)	18.2(0.72)
3/16	4.5(0.18)	9.7(0.39)	10.5(0.41)	5.2(0.21)	2.6(0.10)	19.0(0.76)
1/4	6.3(0.25)	9.7(0.39)	10.5(0.41)	5.2(0.21)	2.6(0.10)	21.0(0.84)
5/16	7.6(0.30)	9.7(0.39)	12.0(0.48)	4.8(0.19)	2.6(0.10)	22.8(0.91)
3/8	9.3(0.37)	9.7(0.39)	12.5(0.49)	4.8(0.19)	2.6(0.10)	22.8(0.91)
1/2	12.6(0.50)	12.8(0.49)	15.0(0.59)	5.2(0.21)	2.6(0.10)	29.0(1.16)
5/8	15.8(0.62)	12(0.47)	18.2(0.72)	4.6(0.18)	2.6(0.10)	34.4(1.35)
3/4	19.4(0.76)	12(0.47)	18.2(0.72)	5.3(0.20)	2.6(0.10)	35.0(1.38)
1	25.4(1.00)	12(0.47)	22.0(0.87)	4.6(0.18)	2.6(0.10)	43.0(1.69)
1-1/8	28.6(1.13)	12.7(0.50)	21.4(0.84)	4.6(0.18)	2.6(0.10)	42.3(1.67)
1-1/4	31.8(1.25)	12(0.50)	26.2(1.03)	4.6(0.18)	2.6(0.10)	46.2(1.82)

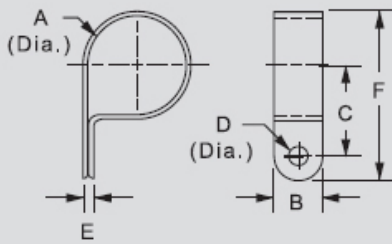


## SELF-ADHESIVE TIE MOUNT

MATERIAL	Approved Nylon 6/6
FLAME-RETARDANT	UL 94-V2
USED METHOD	To apply, simply peel off backing paper and apply mount to surface. After that, cable tie can be inserted to secure wire bundles.

## 粘式固定座

材質	採用UL合格之Nylon 6/6製成，防火等級94-V2，背附雙面膠，絕緣性良好，耐久不易老化
顏色	標準色為尼龍本色(白色)或黑色
特點	使用時將背膠撕去封紙，再將固定座貼於固定處表面，後再配合繫線帶穿於帶孔使用，可省去鑽孔之麻煩

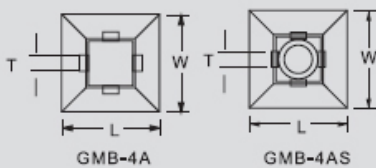

## DIMENSIONS


ITEM NO.	Length (L) mm (inch)	Width (W) mm (inch)	Height (H) mm (inch)	Hole	Tie Width (T) mm (inch)
GMB-4A	19(0.75)	19(0.75)	4.0(0.16)	none	4(0.16)
GMB-4AS	28(1.1)	28(1.1)	5.7(0.22)	5.0	5(0.20)

## SADDLE TYPE TIE MOUNT

MATERIAL	Approved Nylon 6/6
FLAME-RETARDANT	UL 94-V2
USED METHOD	Simply fix mount with a screw and secure wire bundles with nylon cable tie.

## 馬鞍型鎖式固定座

材質	採用UL合格之Nylon 6/6製成，防火等級94-V2，耐酸鹼，不易老化，承受力強
操作溫度	-40 °C ~ 85 °C
顏色	標準色為尼龍本色(白色)或黑色
特點	先用螺絲固定後再配合繫線帶穿於帶孔使用

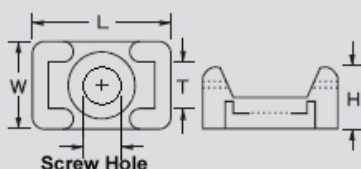

## DIMENSIONS

ITEM NO.	Length (L) mm (inch)	Width (W) mm (inch)	Height (H) mm (inch)	Hole	Tie Width (T) mm (inch)
GCM-S	15(0.59)	10(0.39)	7(0.28)	3.5	5.0 (0.20)
GCM-L	23(0.91)	16(0.63)	9(0.35)	5.0	9.0 (0.36)